

(12) UK Patent Application (19) GB (11) 2 195 255 (13) A

(43) Application published 7 Apr 1988

(21) Application No 8623412

(22) Date of filing 30 Sep 1986


(71) Applicant
Vacutec UK Limited

(Incorporated in United Kingdom)

St. Andrew's House, 31 Greek Street, Stockport

(72) Inventors
Ole Thorn
Flemming Danhild Feld
Jimmy Paisnow
David Hallam(74) Agent and/or Address for Service
McNeight & Lawrence,
Regent House, Heaton Lane, Stockport SK4 1BS(51) INT CL⁴
A61H 7/00 9/00(52) Domestic classification (Edition J):
A5R EQ(56) Documents cited
GB A 2149655 GB 1110824 GB 0379824(58) Field of search
A5R
Selected US specifications from IPC sub-class A61H**(54) Method and apparatus for vacuum treatment of an epidermal surface**

(57) When treating an epidermal surface (surface of the skin) (3) with subatmospheric pressure supplied from a source (not shown) through a flexible tube (6), an applicator (4) is used consisting of a first, porous layer (7) of e.g. felt and a second, airtight layer (8) of e.g. plastic sheet material, the edge portions (9) of which extend beyond the first layer (7) and form a seal against the epidermal surface (3).

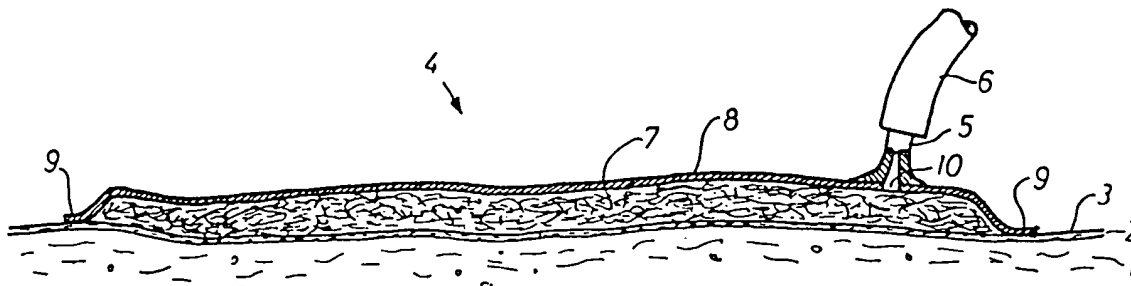**Fig.1**

601/6

30 SEP. 86- 23412

D F A

2195255

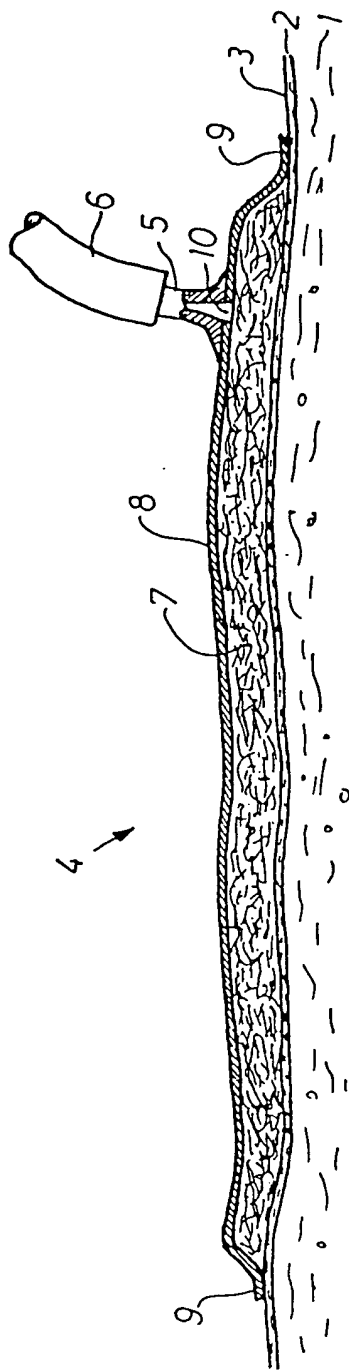


Fig. 1

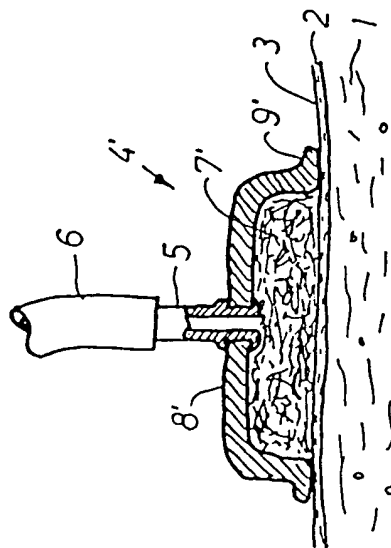


Fig. 2

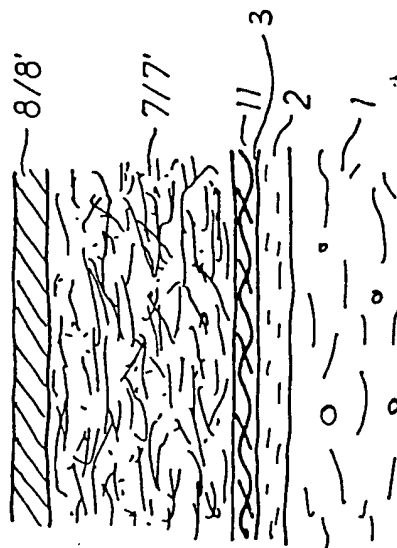


Fig. 3

SPECIFICATION

Method and apparatus for vacuum treatment of an epidermal surface

5

The present invention relates to a method of applying subatmospheric pressure or partial vacuum to an epidermal surface.

- Previously known methods of this kind usually involve placing the limb or other part of the body whose epidermal surface is to be treated with subatmospheric pressure, in a closed airtight chamber which is then evacuated, for example, by using a vacuum pump. To prevent the walls of the chamber from collapsing under the influence of atmospheric pressure, they must have considerable strength, especially in consideration of the subatmospheric pressure possibly being as low as 0.55 bar, corresponding to an external positive pressure on the chamber of almost half an atmosphere. Since the limb or part of the body in question is necessarily connected at one end to the body of the person in question, special measures must be taken to form an air-tight seal between that end of the vacuum chamber, through which the part of the body has been introduced, and that part itself. In cases where the subatmospheric pressure is to be applied to a large part of the body of the person in question, such as the part comprising the thorax and the abdominal cavity, the application of subatmospheric pressure to the outside of this part of the body may cause internal organs containing air or gases to be distended, and breathing may be disturbed.

- Another disadvantage with the known methods is that the space within the vacuum chambers around the part of the body or limb may need to be of rather large volume, for which reason it may take a long time to evacuate them.

- It is an object of the present invention to provide a method of the kind referred to free of the disadvantages mentioned above and being suitable for implementation by personnel without great technical ability with regard to operating apparatus.

- According to the present invention there is provided a method of applying subatmospheric pressure to an epidermal surface, said method being of the kind comprising the formation of an airtight space outside said surface, said space being connected to a source of subatmospheric pressure activated to lower the pressure in said space, characterised in that said airtight space is formed by

- (a) placing on and/or along said epidermal surface a first layer consisting of a porous and preferably flexible material of a kind comprising mutually communicating pores not losing the mutual communication when the material is subjected to compressive forces, and
(b) placing on the outside of said first layer

and preferably also on the part of the epidermal surface closest thereto and not covered by said first layer, a second layer consisting of airtight and preferably flexible material.

- Such a method is extremely easy to carry out, and provides partly the advantage that the force on the epidermal surface caused by the subatmospheric pressure is counterbalanced by the mechanical force produced by the same subatmospheric pressure acting on the second layer and hence on the epidermal surface. This force does, however, act on the epidermal surface solely on the relatively limited contact areas between the pores in the first layer, so that the epidermal surface facing the pores is fully influenced by the subatmospheric pressure. Experience has shown that the effect on the cutis and possibly underlying tissue is not inferior to the effect obtainable by using the previously known methods mentioned above.

The present invention also relates to an applicator for use in carrying out the method of the invention.

- The invention will be further apparent from the following description with reference to the accompanying drawing in which:

- Figure 1 is a sectional view showing a region of skin with an applicator according to a first embodiment placed thereon;

- Figure 2 is a sectional view similar to Figure 1 through a skin region with an applicator according to a second embodiment; and

- Figure 3 shows the use of a protective layer between the skin and the applicator on an enlarged scale.

- The drawings show diagrammatically a skin region consisting of subcutis 1 and epidermis 2, the latter having an external epidermal surface 3.

- With the purpose of applying subatmospheric pressure to a part of the epidermal surface 3, there is on that surface placed a vacuum applicator 4, being connected to a source (not shown) of reduced pressure, which may be of a previously known type, through a tube-connecting stub 5 and a flexible tube 6.

- In the embodiment shown in Figure 1, the vacuum applicator comprises a first layer 7, lying in contact with a part of the epidermal surface 3. The first layer 7 consists of porous material, the pores of which are interconnected and do not close upon application of a compressive force to the material. Such a material may for example be felt, which—as is well known—consists of mutually entangled fibres of wool or other natural or synthetic fibre. The vacuum applicator 4 further comprises a second layer 8, placed on top of (outside of) the first layer 7 and being so much larger than the latter in the extent of its area, that it is also in direct contact with the epidermal surface 3 with an edge portion 9. The second layer 8 is airtight and may, for

example, be constituted by a thin sheet of plastics or rubber. To make it possible to adapt the shape of the vacuum applicator 4 to the shape of the limb or body part in question, both the first layer 7 and the second layer 8 should be flexible, and this condition is fulfilled by using the materials mentioned.

In the second layer 8 there is formed a hole 10, and the tube-connecting stub 5 is secured to the second layer 8 in such a manner, such as by means of glue or cement, that the opening in the stub 5 communicates with the hole 10.

When the source (not shown) of subatmospheric pressure is connected to the flexible tube 6 the space between the epidermal surface 3 and the inside of the second layer 8 is evacuated through the stub 5 and the hole 10. If the first layer 7 were not present in this space, then the space would collapse immediately at the onset of the evacuation, and the second layer 8 would contact the epidermal surface in a fluid-tight manner, so that the subatmospheric pressure in the flexible tube 6 would be unable to reach the region of the epidermal surface covered by the vacuum applicator 4. The porous first layer 7 does, however, in a purely mechanical manner keep the second layer 8 spaced from the epidermal surface 3, for which reason the subatmospheric pressure between the fibres in the first layer 7 can propagate through the entire space between the epidermal surface 3 and the second layer 8, so that the part of the epidermal surface underlying the first layer 7 will in its entirety be subjected to subatmospheric pressure. At the same time, the epidermal surface 3 will be subjected to a mechanical force acting thereupon from the most adjacent fibres in the first layer 7, but since these fibers will only be in contact with a limited portion of the area of the epidermal surface 3, the major part of this surface will be subjected to the subatmospheric pressure.

Apart from the weight of the vacuum applicator 4, no net mechanical force is applied to the limb or body part comprising the epidermal surface 3, because the surface 3 is partly acted upon by an upwardly (as seen in Figure 1) directed force corresponding to the magnitude of the subatmospheric pressure multiplied by the area in question, while the epidermal surface 3 at the same time is acted upon by a downwardly directed force transmitted through the first layer 7, said downwardly directed force being caused by the effect of the very same subatmospheric pressure acting on the inside of the second layer 8, the area of which is substantially the same as the area of the epidermal surface 3 being acted upon. In spite of the apparently paradoxical situation involving the epidermal surface 3 simultaneously being acted upon by two equal and oppositely directed forces, the subatmospheric pressure in the first layer 7 will act upon the tissue

below or behind the epidermal surface 3, since the subatmospheric pressure has access to the tissue through a rather large percentage of the surface, only the remaining part of the surface being acted upon by the mechanical force as directed downwards in Figure 1.

Thus, practice has shown that by using a vacuum applicator constructed according to the principles illustrated in Figure 1 and explained in the foregoing, it is possible to obtain an effect on the cutis 1 2 and possibly the underlying tissue at least as effective as that obtainable using previously known apparatus for subjecting epidermal surfaces to subatmospheric pressures.

The first and second layers 7 and 8 respectively shown in Figure 1 may be extended in all directions and shaped in such a manner, that they for example form a bag-like or sleeve-like structure, that may be placed around a greater or smaller part of the body in question. In certain instances, however, it may be desirable to apply subatmospheric pressure to a very limited region of the epidermal surface, and in such cases it is possible to employ a vacuum applicator 4' as shown diagrammatically in Figure 2. Like the vacuum applicator 4 shown in Figure 1, the vacuum applicator 4' shown in Figure 2 also consists of a first layer 7' and a second layer 8'. Of these, the first layer 7' may—apart from the size—be identical to the first layer 7 shown in Figure 1, while the second layer 8' as shown in Figure 2 may be constituted by a vacuum cup, with which the tube-connecting stub 5 and with it the flexible tube 6 are connected in a known manner. The edge portion 9' of the vacuum cup 8' provides the requisite sealing effect against the epidermal surface 3.

In order to avoid the first layer 7 or 7' becoming dirty and to prevent the transmission of infectious matter from one person to another, it is possible as shown in Figure 3 to place a protective layer 11 between the epidermal surface 3 and the first layer 7 or 7'. The protective layer 11 should—of course—be made of a material capable of both transmitting the subatmospheric pressure and the mechanical force from the first layer 7 or 7', and to this end the protective layer 11 can suitably consist of a textile material, such as sheeting or the like, that may be disposable or laundered and/or sterilized.

The subatmospheric pressure being transmitted to the epidermal surface 3 by means of the vacuum applicator 4 or 4' may be of the order of magnitude 0.05 to 0.55 bar. The source of subatmospheric pressure (not shown) connected to the flexible tube 6 may be provided with means to adjust the subatmospheric pressure, possibly also means to vary this pressure in a preprogrammed manner, so that the subatmospheric pressure may be varied in a manner suitable for provid-

ing the desired effect on the epidermal region in question, possibly also the underlying tissue.

- It will be appreciated that it is not intended to limit the invention to the above example only, many variations, such as might readily occur to one skilled in the art, being possible, without departing from the scope thereof as defined by the appended claims.

10

CLAIMS

1. a method of applying subatmospheric pressure to an epidermal surface, said method being of the kind comprising the formation of an airtight space outside said surface, said space being connected to a source of subatmospheric pressure activated to lower the pressure in said space, characterised in that said airtight space is formed by

- 20 (a) placing on and/or along said epidermal surface a first layer consisting of a porous and preferably flexible material of a kind comprising mutually communicating pores not losing the mutual communication when the material is subjected to compressive forces, and
- 25 (b) placing on the outside of said first layer and preferably also on the part of the epidermal surface closest thereto and not covered by said first layer, a second layer consisting of airtight and preferably flexible material.

- 30 2. A method according to claim 1, characterised by using as the first layer a layer of fibrous material.

3. A method according to claim 1 and claim 35 2 wherein said first layer is of felt.

4. A method according to claim 1, 2 or 3 characterised by using as the second layer a flexible sheet or foil.

5. A method according to claim 1 and claim 40 4 wherein said second layer is of plastics.

6. A method according to claim 1, 2 or 3 characterised by using as the second layer a vacuum cup, the internal space of which has substantially the same height as said first layer, and the peripheral edge of which is in contact with the epidermal surface around the first layer.

7. A method according to any one or any of the claims 1-6, characterised in that a protective layer of air-permeable material is placed on the epidermal surface prior to the first layer being placed thereon.

8. A method according to claim 7 wherein said protective layer is a textile material.

- 55 9. An applicator for carrying out the method according to any one or any of the claims 1-8, characterised by

- (a) a first layer consisting of porous and preferably flexible material of the kind with mutually communicating pores not losing the mutual communication when the material is subjected to compressive forces, and

- 60 (b) a second layer adapted to be placed on the outside of the first layer and consisting of airtight and preferably flexible material, said

second layer having a greater extent in area than said first layer and comprising means for connecting the space below or behind said second layer with a source of subatmospheric pressure.

- 70 10. An applicator according to claim 9, characterised in that said first layer consists of fibrous material.

11. An applicator according to claim 10 wherein said first layer is of felt.

- 75 12. An applicator according to claim 9, 10 or 11 characterised in that said second layer consists of flexible sheet material

13. An applicator according to claim 12 wherein said second layer is of plastics.

- 80 14. An applicator according to claim 9, 10 or 11 characterised in that said second layer consists of a vacuum cup, the internal space of which has substantially the same height as the first layer and the peripheral edge of which is adapted to be in contact with the epidermal surface around said first layer.

- 85 15. An applicator according to any one or any of the claims 9-14 characterised by a protective layer of air permeable material adapted to be placed between the epidermal surface and the first layer.

- 90 16. An applicator according to claim 15 wherein said protective layer is a textile material.

95

Published 1988 at The Patent Office, State House, 66/71 High Holborn, London WC1R 4TP. Further copies may be obtained from The Patent Office, Sales Branch, St Mary Cray, Orpington, Kent BR5 3RD. Printed by Burgess & Son (Abingdon) Ltd. Con. 1/87.

French
1928
Feb 20/28 638.30.

N° 638.309

M. Bernd

Pl. unique

3 pages spec.

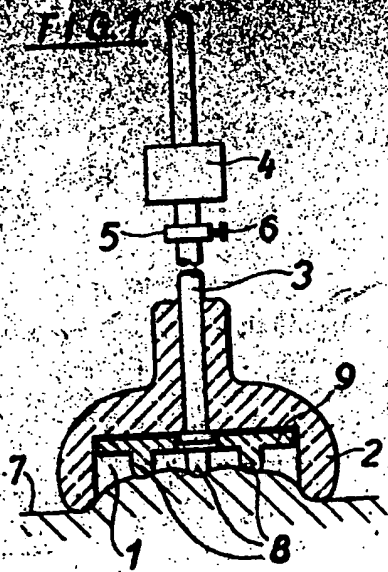
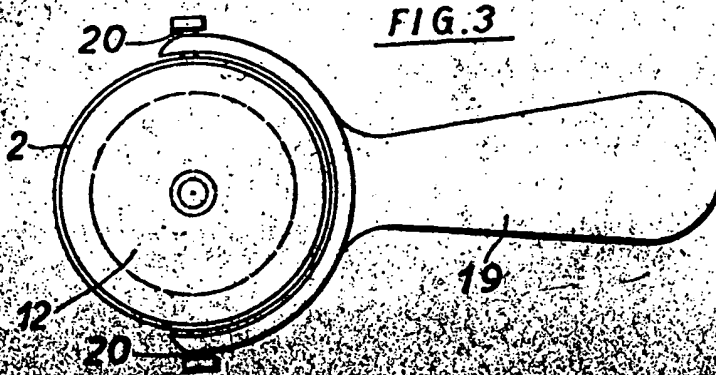


FIG. 4



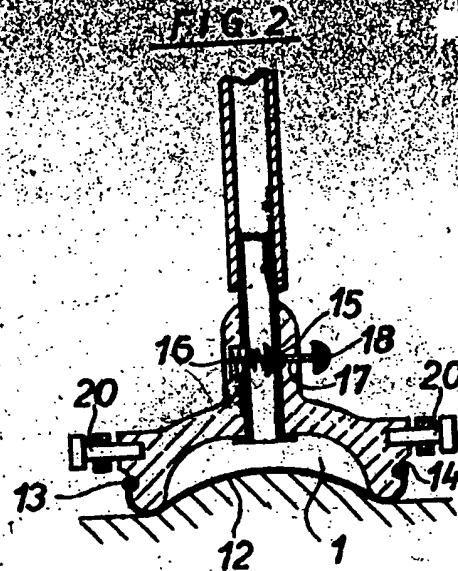


FIG. 5

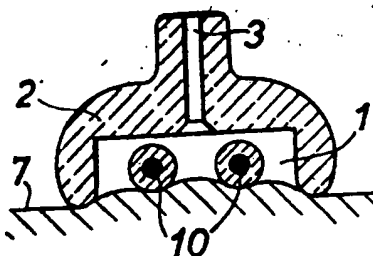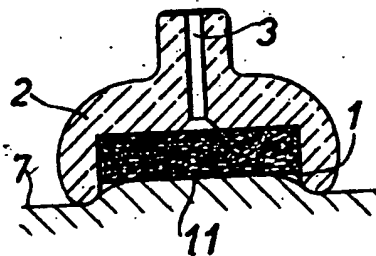

*Prusse mes
rather, etc*

60/6

Les figures 2 et 3 montrent, respectivement, en élévation, avec coupe partielle, et en plan, une autre forme d'exécution du bol d'aspiration et de sa liaison avec la poignée.

5 Les figures 4 et 5 montrent, en coupe médiane verticale, deux autres formes d'exécution du bol d'aspiration.

Ainsi que le montre la forme d'exécution d'après la figure 1, l'organe de massage 2, 10 constitué comme un bol d'aspiration, et comprenant la chambre creuse 1 en forme de cloche, est relié, au moyen de la canalisation d'aspiration 3, à une pompe d'aspiration 4 d'un type quelconque. Une soupape 15 de réduction 5 est disposée entre la pompe et l'organe de massage, la vis 6 permettant de régler cette soupape au degré de dépression voulu. La soupape de réduction peut aussi être fixée sur l'organe de massage lui-même, ou sur la pompe. De même, en supprimant la canalisation de liaison, la pompe peut être réunie avec l'organe de massage.

Si la pompe 4 est mise en action, et que la soupape de réduction 5 soit convenablement 15 réglée, une dépression permanente est produite dans la chambre creuse 1 de l'organe de massage 2, de telle sorte que, ainsi que le montre la figure 1, la surface de la peau 7 de la partie du corps qui subit le massage 30 pénètre quelque peu à l'intérieur de la chambre creuse. Si, alors, l'organe de massage est déplacé à la main sur le corps, la pompe d'aspiration 4, qui travaille continuellement, maintient constamment la dépression 35 au degré voulu.

Afin d'éviter une pénétration trop forte de la peau à l'intérieur du bol, on peut, conformément à l'invention, disposer, à l'intérieur du bol d'aspiration 2, des dispositifs 40 qui permettent de soutenir la peau. D'après la figure 1, on a prévu, dans ce but, plusieurs saillies 8 qui peuvent être disposées sur une plaque 9, laquelle peut être placée dans le bol d'aspiration 2. On peut aussi utiliser 45 des galets 10, qui peuvent tourner sur leurs axes (fig. 4) et qui agissent également pour renforcer l'action de massage; on peut aussi employer une masse poreuse 11 (fig. 5), par exemple en caoutchouc. D'ailleurs, dans le 50 même but, on peut disposer, dans la surface d'aspiration, des trous, ou bien des barreaux transversaux qui servent de supports. La

surface d'aspiration peut aussi être établie en forme de grille, et il est clair que le support de la peau peut aussi être obtenu par 55 tous autres dispositifs de supports appropriés. L'organe de massage peut aussi être constitué sous forme de plusieurs bols d'aspiration, fixés les uns aux autres de toute manière appropriée. 60

Les figures 2 et 3 montrent une autre forme d'exécution dans laquelle la chambre creuse de l'organe de massage 2 est recouverte par une membrane 12 se composant d'une matière flexible, cette membrane étant 65 maintenue à l'état de tension par un jonc d'arrêt 13 pénétrant dans une gorge 14 de l'organe de massage. Le recouvrement constitué par la membrane 12 a pour objet d'empêcher que des onguents, crèmes, 70 pomades, etc.; qui peuvent être employés en vue du massage, ne puisse parvenir dans la canalisation d'aspiration. Lorsque, sous l'action de l'aspiration, la membrane 12 a complètement pénétré dans la chambre 1, et 75 recouvre par conséquent le débouché de la canalisation d'aspiration 3, que cette membrane obture, la dite membrane doit être ramenée dans sa position initiale. A cet effet, on utilise un organe de fermeture, par ex- 80 emple une soupape conique 15, laquelle est pressée sur son siège par le ressort 16; le siège de la soupape 15 termine un conduit 17 qui relie la canalisation d'aspiration avec l'air extérieur. Par le bouton 18, la 85 soupape 15 peut être ouverte, de telle sorte que l'action d'aspiration est interrompue, et que la membrane 12 est ramenée dans la position initiale. La disposition de l'organe de fermeture 15 et du canal 17 débouchant 90 à l'extérieur peut aussi être employée dans des appareils de massage sans membrane, et, dans ce cas, sert à équilibrer la différence de pressions par liaison avec l'air extérieur, de manière à interrompre immédiatement l'ac- 95 tion de massage. La soupape de réduction 6 peut ne former qu'un seul et même organe avec le système de fermeture 15.

Dans la forme d'exécution représentée par les figures 2 et 3, le bol d'aspiration de 100 l'organe de massage 2 est entouré par une poignée 19 établie en forme d'étrier, cette poignée pouvant tourner sur des axes 20, de telle sorte que, sans que la canalisation

En raison de l'organe de massage 2, si cet organe de massage 2 est un obstacle, il est possible, au moyen de la poignée 19, de maintenir et de guider commodément l'organe de massage 2 dans le sens voulu. Au lieu de cette liaison entre l'organe de massage 2 et la poignée, cette liaison peut aussi être articulée de toute autre manière, l'organe de massage 2 pouvant effectuer des rotations ou de compression ou de traction de manière quelconque, par exemple, par exemple, par rotation. De même, la liaison entre l'organe de massage 2 et la poignée 19 ou de compression ou de traction permanente, ou de manière quelconque, la poignée de l'organe de massage 2 étant en liaison avec l'organe de massage 2, on peut utiliser, au lieu de la poignée 19, plusieurs

5°. Le dispositif d'aspiration, qui, de compression agissant continuellement, est disposé sur l'organe de massage avec interposition d'une canalisation d'aspiration, crée la compression telle qu'on l'a vu ci-dessus.

6° Le dispositif d'aspiration ou de contre-pression, agissant continuellement, peut être réglé suivant les besoins, par une commande de réduction réglable.

7° On dispose un organe de fermeture dans la canalisation qui relie l'organe de massage avec le dispositif d'aspiration ou de compression agissant en permanence. L'ouverture de ce dispositif assurant l'équilibrage de la différence de pressions en liaison avec la canalisation d'aspiration ou de compression pouvant, en même temps, être fermée.

8° La soupape de réduction est commandée en même temps, comme un organe de l'ensemble, et de manière à ne pas gêner le

des fruits de la forêt
des pommes, des poires, des cerises,
mamelons, des noix, des châtaignes,
une griffe, une main, un bras.

1.2 La chambre creuse est fermée à l'extérieur par une membrane;

12° La canalisation d'expansion ou de compression est guidée par le ressort.

13. L'organe de massage est relié au système de circulation avec la poignée afin d'être en contact régulier avec le système de circulation universel et un système de massage.

ADOLF HITSLER
 The president
 of the
 German
 People's
 Party

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.